


---

**2018 - 2020**  
**SYNTHETIC**  
**LEATHER**  
**FOR OUTDOOR**



TECHNICAL TEXTILE FOR OUTDOOR

COMPOSITION : 100% PVC  
WIDTH : 137 cm  
WEIGHT : 764 gr/m<sup>2</sup>  
THICKNESS : 1.25 mm ± 0.05 mm

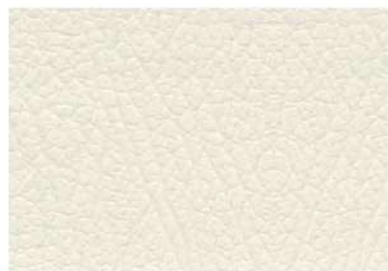

BRITTAS 130



BRITTAS 164



BRITTAS 140



BRITTAS 162



BRITTAS 160



BRITTAS 161



BRITTAS 010



BRITTAS 021



BRITTAS 040



BRITTAS 060



BRITTAS 163




BRITTAS 080



BRITTAS 090



COMPOSITION : 100% PVC  
WIDTH : 137 cm  
WEIGHT : 736 gr/m<sup>2</sup>  
THICKNESS : 1.25 mm ± 0.05 mm

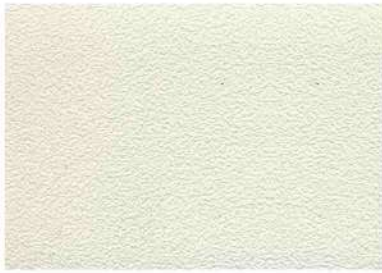

SELLIN 130



SELLIN 164



SELLIN 140



SELLIN 162



SELLIN 160



SELLIN 161



SELLIN 010



SELLIN 021



SELLIN 040



SELLIN 060



SELLIN 163



SELLIN 080



SELLIN 090

# TECHNICAL DATA

## DESCRIPTION

Tensile Strength  
(EN ISO 1421)

Tear Strength  
(EN ISO 13937-3)

Bursting Strength  
(ISO 2286-2)

Abrasion Resistance  
(EN ISO 12947-2)

Color Fastness to Artificial Weathering  
(BS EN ISO 105 - B04)

Color Fastness to Rubbing  
(BS EN ISO 105 E02) - max 5

Dry Rubbing

Wet Rubbing

Extreme Working Temperature  
(-30°C / +70°C)

Anti Mildew  
(AATCC 9144 & NCTC 8196)

Soil & Stain Release  
(AATCC 130)

Water Repellency : Spray Test  
(AATCC 22)

Hydrostatic Pressure Test (60mm/bar)  
(AATCC 128)

Weatherability  
(ASTM G53-96) - American Standard (hours)

## FLAMMABILITY

- Cigarette (BS EN 1021 - 1)
- Match (BS EN 1021 - 2)
- MVSS Horizontal (MVSS 302)
- FAA Vertical (FAA 25.853)

## BRITTAS

Warp: 471 N  
Weft : 211 N

Warp: 37 N  
Weft : 45 N

716 Kpa

> 350,000 rubs

8

Warp: 4-5  
Weft : 4-5

Warp: 4-5  
Weft : 4-5

Pass

Pass

5

70

79

1,000 hours

Pass

Pass

Pass

Pass

## SELLIN

Warp: 597 N  
Weft : 467 N

Warp: 44 N  
Weft : 54 N

1,327 Kpa

> 350,000 rubs

8

Warp: 4  
Weft : 4

Warp: 4-5  
Weft : 4-5

Pass

Pass

5

70

> 130

1,000 hours

Pass

Pass

Pass

Pass



Easy Maintenance



Water Proofing



Flame Retardant



Flexibility



UV Resistant

Stock may vary from sample in color & texture



produced by:

