

---


**2018 - 2020**  
**SLING**



TECHNICAL TEXTILE FOR OUTDOOR



COMPOSITION : 30% Polyester, 70% PVC  
WIDTH : 180cm  
WEIGHT : 530 ± 5% gr/m<sup>2</sup>  
ABRASION (Rubs) : >50.000

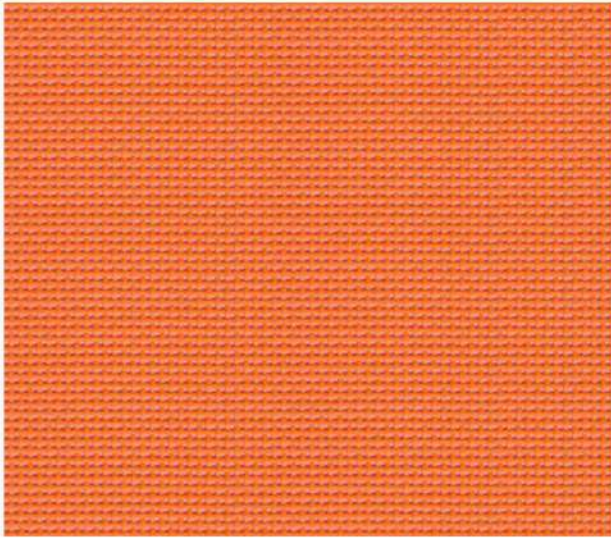


VASCO#R




\*VASCO#R 132 | 1010



VASCO#R 130 | 3030



VASCO#R 160 | 6060



VASCO#R 161 | 6161



VASCO#R 162 | 6565



VASCO#R 170 | 6262




VASCO#R 090 | 9090



VASCO#R 163 | 5555




VASCO#R 180 | 5151




VASCO#R 140 | 4040



VASCO#R 142 | 4242




VASCO#R 141 | 4545




VASCO#R 150 | 5050



VASCO#R 080 | 8080



VASCO#R 050 | 4848




VASCO#R 100 | 5353





VASCO#R 010 | 2222




VASCO#R 210 | 7878




VASCO#R 120 | 1313


COMPOSITION : 30% Polyester, 70% PVC  
 WIDTH : 180cm  
 WEIGHT : 530 ± 5% gr/m<sup>2</sup>  
 ABRASION (Rubs) : >50.000



OSTEND#R 160 | 3065



OSTEND#R 161 | 1065

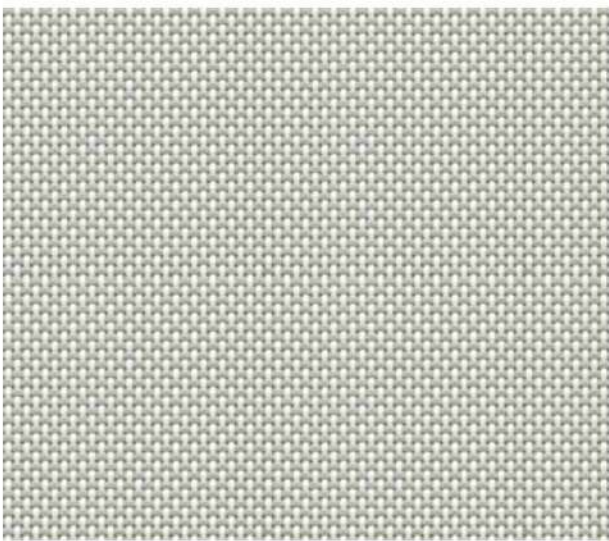

OSTEND#R




OSTEND#R 091 | 6090




OSTEND#R 092 | 6590




OSTEND#R 162 | 6580



OSTEND#R 181 | 5190



OSTEND#R 133 | 3060



OSTEND#R 163 | 6142




OSTEND#R 180 | 4051



OSTEND#R 080 | 4080




OSTEND#R 182 | 5080




OSTEND#R 050 | 4842







OSTEND#R 101 | 5342



OSTEND#R 100 | 4853



OSTEND#R 221 | 7842




OSTEND#R 040 | 1378



OSTEND#R 122 | 1390

COMPOSITION : 30% Polyester, 70% PVC  
WIDTH : 180cm  
WEIGHT : 335 ±5% gr/m<sup>2</sup>  
ABRASION (Rubs) : >50.000

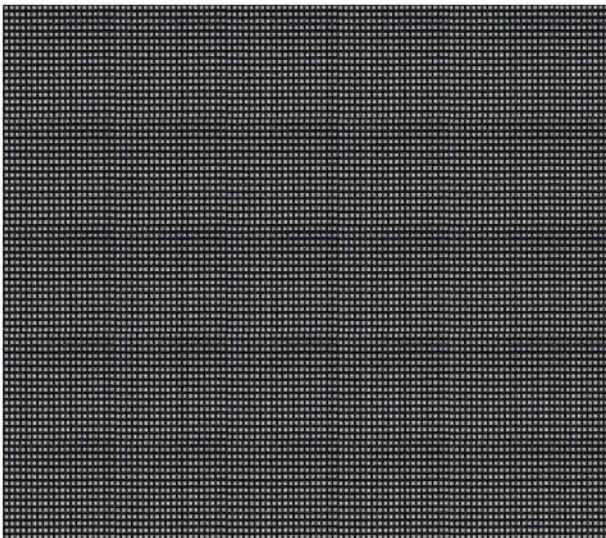


VARCA 090 | 9090







COMPOSITION : 30% Polyester, 70% PVC  
 WIDTH : 180cm  
 WEIGHT : 734 ±5% gr/m<sup>2</sup>  
 ABRASION (Rubs) : >50.000

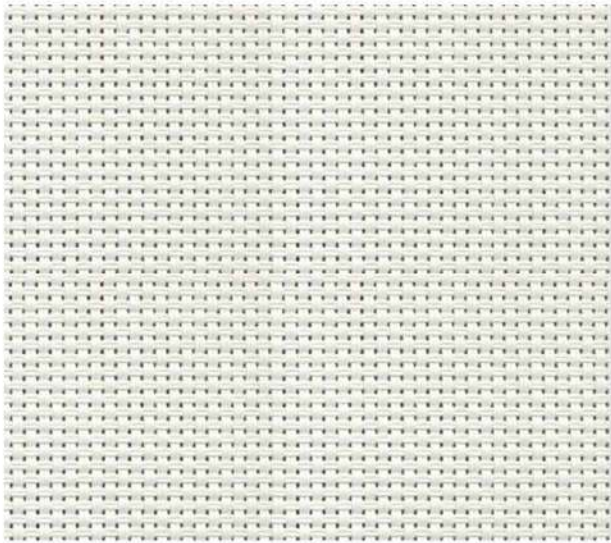


TRAMORE




TRAMORE 130 | 3030



TRAMORE 131 | 3060



TRAMORE 160 | 6060



TRAMORE 161 | 6161



TRAMORE 162 | 6565



TRAMORE 091 | 6590




TRAMORE 090 | 9090



TRAMORE 092 | 5190




TRAMORE 180 | 5151




TRAMORE 163 | 5555




COMPOSITION : 30% Polyester, 70% PVC  
 WIDTH : 180cm  
 WEIGHT : 613±5% gr/m<sup>2</sup>  
 ABRASION (Rubs) : >50.000

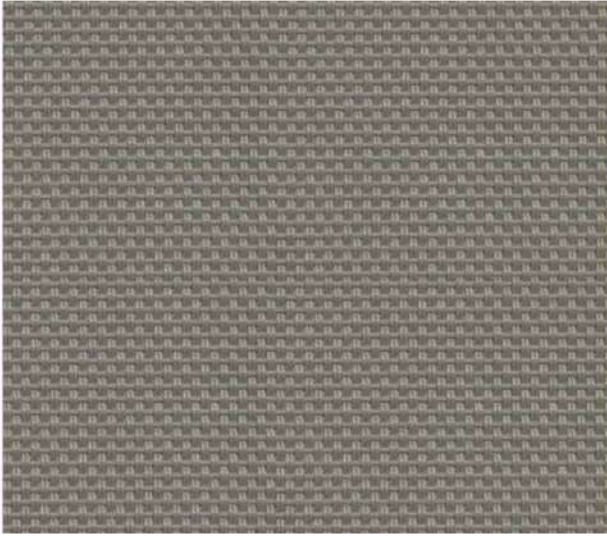


GREYSTONE#R




GREYSTONE#R 130 | 3030



GREYSTONE#R 164 | DL01



GREYSTONE#R 160 | 6060



GREYSTONE#R 161 | 6161



GREYSTONE#R 162 | 6565




GREYSTONE#R 091 | 6590



GREYSTONE#R 090 | 9090



GREYSTONE#R 163 | 5555



GREYSTONE#R 180 | 5151

## INCOMPARABLE PERFORMANCE



Three Years Warranty Under Normal Usage



Ultra Violet Resistance, ASTM G53-96



Flame Retardant, BS EN 1021-1 & 2



Anti Mould Stain & Fungi, BS EN ISO 846 : 1997



Non Toxic Heavy Metal Free



Phthalate Free



VOC Free



Formaldehyde Free



Printable



Breathable, Allow the Air to Flow Through



Easy Maintenance and Washable



# OUTDOOR LIVING. RELIEVE YOUR SENSES.

---

The lifestyle of modern living has gradually shifted from indoor to outdoor living. Just imagine sitting in your beautiful garden, relaxing on your veranda or dozing off by the pool side while enjoying the cool breeze gently brushing through your skin and admiring the beautiful view of the nature decorated with flower, green pasture and clear blue sky in perfect harmony.

As a dynamic company which focuses on creativity and innovation, we proudly present to you Sunproof® Sling, a woven fabric consists of PVC coated polyester yarn which provides incomparable performance : strong, breathable, vibrant and durable (strong color fastness, and excellent resistance to ultra violet rays, mould and tear).

## “Comfort & Breathable”

Sunproof® Sling is breathable. The openness of the sling allows the air to flow through, releasing heat and providing you with the coolness as you relax on the seat.

## “Strength & Durable”

Sunproof® Sling applies special ultraviolet blocking agents which protect the polymer back bone of the PVC coated fiber, therefore it is proven to have the strong ability to withstand the damaging effect of sunlight, wind, rain, and humidity.

## “Excellent Color Fastness & Long Lasting”

Sunproof® Sling is uses excellent quality of raw material. This is to ensure that when it is exposed to sun light or rain for an extended period, it will not fade or lose the intensity of its color. It is long lasting.

## “Easy Maintenance & Sustainable”

Sunproof® Sling is carefully processed and has gone through a special treatment to resist stain, oil, and water. It is easily maintained. You can simply clean it with a wet sponge or a damp cloth with a mild detergent. Then just let it to dry thoroughly.

## “Resistance to Humid Environment & Staying Fresh”

Sunproof® Sling is carefully treated to inhibit microbial development, mould stain and algae infestation, even in the moist environment ; keeping the fabric fresh and clean.



# TECHNICAL DATA

<u>DESCRIPTION</u>	<u>VASCO#R</u>	<u>OSTEND#R</u>	<u>VARCA#R</u>	<u>TRAMORE</u>	<u>GREYSTONE#R</u>
Breaking Strength [daN / 5cm] (ISO 1421, Strip Test Method)					
Warp	190	190	121	323	213
Weft	171	171	97	305	147
Elongation Under Load 20 daN [%] (ISO 1421)					
Warp	4.5	4.5	3	4	3
Weft	2.5	2.5	2.5	2.5	2.5
Tear Strength [daN] (DIN 53363)					
Warp	30	30	33	56	29
Weft	34	34	27	51	28
Color Fastness to Artificial Weathering [grade] (ISO 105 : B04)	8	8	8	8	8
Antifungal (BS EN ISO 846 : 1997)	Pass	Pass	Pass	Pass	Pass
Extreme Light Stability [hours] (ASTM G53-96)	2,000	2,000	2,000	2,000	2,000
<b>FLAME RETARDANT *</b>					
• Cigarette (BS EN 1021 - 1)	Pass	Pass	Pass	Pass	Pass
• Match (BS EN 1021 - 2)	Pass	Pass	Pass	Pass	Pass
• NFPA 701-2010	Pass	Pass	Pass	Pass	Pass
Extreme Working Temperature	Pass	Pass	Pass	Pass	Pass
Oekotex Standard 100	Pass	Pass	Pass	Pass	Pass
Management Quality System	ISO 9001	ISO 9001	ISO 9001	ISO 9001	ISO 9001
Environmental Management System	ISO 14001	ISO 14001	ISO 14001	ISO 14001	ISO 14001

\* Vasco#R - 132 | 1010 FR Standard BS EN 1021-1

Stock may vary from sample in color & texture



3 Years  
Warranty



UV  
Resistance



Fire  
Retardant



Anti  
Moulding



Non Toxic  
Heavymetal Free



Phthalate Free



VOC Free



Formaldehyde  
Free



Printable



Breathable



Easy  
Maintenance



produced by:

